

TIGER Drylac®

series 75

fluoropolymer powder coatings

volume 2



TIGER Drylac®
Powder Coatings


TIGER Drylac® Series 75 – Exterior and Interior

A unique powder coating offering superior weatherability for architectural applications on aluminum based on Fluoropolymer

Features	Designed to meet the performance levels described in AAMA 2605-05 Highest performance architectural powder coating offering Superior Gloss and Color Retention Outstanding Resistance to Fading Outstanding Resistance to Chalking Good Chemical Resistance Good Edge Coverage Good Storage Stability
Typical Applications	All Architectural and Construction Applications including: Metal Facades Marine Equipment Curtain Walls Window Frames Railings Light Poles
Standard Series 75	Smooth Glossy Smooth Semigloss Smooth Matte Solid Colors and Metallics
Custom Colors	Other colors and finishes are available as custom colors with 220 lb minimum order quantity. However, due to the extreme durability requirements, organic pigments as a class cannot be used. This limits the colors to earth tone colors and colors of similar chromaticity in other parts of the spectrum, such as red, blue and green. Evaluations by our laboratory on a case to case basis are necessary.
Standard Packaging	44 lbs/20 kg cartons or 5 lb Minipacks
Specific Gravity	Approximately 1.4 – 1.8 (g/cm ³) depending on pigmentation (ASTM D792)
Theoretical Coverage	at specific gravity 1.7 and film thickness of 2.5 mils / 60 µm: 45.2 sq ft/lb / 9.2 m ² /kg
Processing	Corona and Tribo* manual or automatic *Suitability of metallic effects for Tribo processing must be verified prior to application. Please consult our latest edition of relevant information sheets.
Dry Storage Stability	6 months at no more than 77° F / 25° C

Weather Resistance

Gloss Retention according to AAMA 2605-05 – Remaining Gloss vs. Years

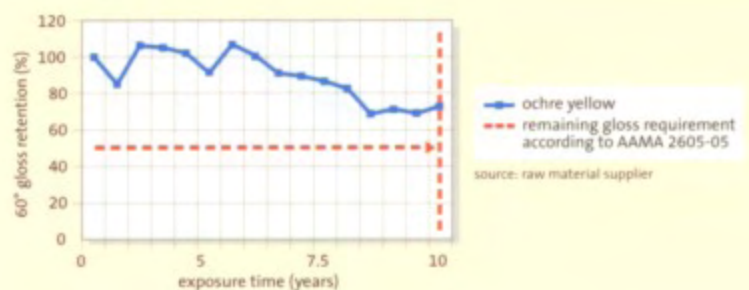

PLEASE NOTE: We have a tremendous amount of confidence in the performance of our Series 75 products and have therefore increased our warranty period to 30 years.

Users:
Contract - Real Estate Developer

Product Description

TIGER Drylac® Series 75 is a unique powder offering superior weatherability for an aluminum, based on fluoropolymer, w 2605-05 standards. Due to our 15 year with this product line, it can only be applied by Drylac® Approved Applicators. A current Approved Applicators is available upon



TIGER Drylac®
Powder Coatings

TIGER

before, during and after
30 year performance finish.


Pretreatment Requirements

A 5-stage pretreatment is highly recommended. Chromating according to ASTM B 449, Anodizing according to AAMA 2603-02 Quality and Test Regulations or Chrome-free according to AAMA 2605-05 are acceptable methods.

General Conditions

Under normal circumstances a single coat of Series 75 powder coating is sufficient. Powder Coating must be applied over a clean dry substrate, free of any contaminants and oxidation.

Cure Parameters

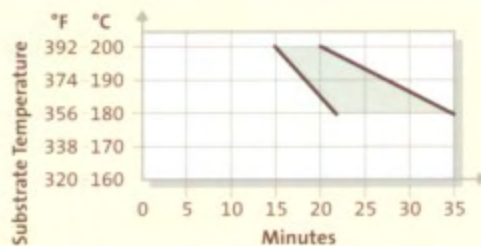



Special Applications — TIGER Shield System

In highly corrosive conditions, such as found in coastal regions (salt, fog) or industrial atmospheres, a 2-coat system of TIGER Drylac® Dryprotector Primer 69/70000 plus a topcoat of Series 75 is highly recommended. Both products are engineered to complement each other and offer an excellent corrosion barrier. This 2-coat system warrants an optimum non-porous film, as well as excellent UV protection. Base coat must be applied over a clean dry substrate, free of contaminants and oxidation. Note: Time lapse between application of Dryprotector Primer and Series 75 topcoat must not exceed 12 hours.

Theoretic Coverage

The Specific Gravity of 69/70000 Dryprotective Primer is $1.6 \pm 0.1\text{g/cm}^3$. The TIGER Shield system (primer plus top coat) is normally applied between 4.0 and 5.0 mils / 90-125 microns.

Cure Parameters

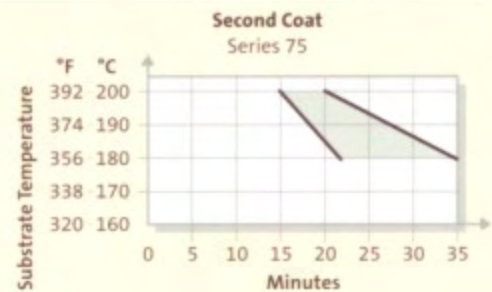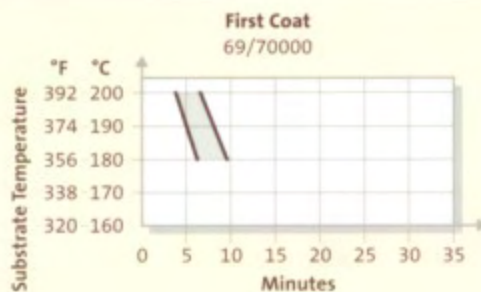

Providing Environmentally Friendly
Powder Coatings for a Sustainable World



TIGER Drylac® **Sea Shell White**
75/10130 30±5*



TIGER Drylac® **Taupe**
75/70070 30±5*



TIGER Drylac® **Koko Brown**
75/60018 30±5*




TIGER Drylac® **Aged Copper**
75/60006 20±5*



TIGER Drylac® **Bone White**
75/10070 20±5*



TIGER Drylac® **Sierra Tan**
75/15022 30±5*



TIGER Drylac® **Boysenberry**
75/30033 20±5*



TIGER Drylac® **Ivy Green**
75/50080 30±5*



TIGER Drylac® **Sky Grey (RAL 7035)**
75/70048 30±5*



TIGER Drylac® **Ash Grey**
75/70025 30±5*



TIGER Drylac® **Redwood**
75/30041 30±5*




TIGER Drylac® **Classic Green**
75/50037 30±5*



TIGER Drylac® **Almond**
75/15013 30±5*



TIGER Drylac® **Slate Grey**
75/70019 30±5*



TIGER Drylac® **Brick Red**
75/30028 20±5*



TIGER Drylac® **Hartford Green**
75/50110 30±5*



TIGER Drylac® **Sandstone**
75/15012 30±5*



TIGER Drylac® **Medium Bronze**
75/60014 30±5*



TIGER Drylac® **Seafoam Green
Metallic** 75/50035



TIGER Drylac® **Statuary Bronze**
75/60080 30±5*




TIGER Drylac® **Medium Bronze Metallic** 75/60060



TIGER Drylac® **Bianco 750** 75/10001 68±7°



TIGER Drylac® **Deore 732 Metallic** 75/60003



TIGER Drylac® **Azzuro 781 Metallic** 78/40004



TIGER Drylac® **Interstate Blue** 75/40025 20±5°



TIGER Drylac® **Bianco 751** 75/10003 42±7°



TIGER Drylac® **Argento 706 Metallic** 75/15007



TIGER Drylac® **Champagne 772 Metallic** 75/15004



TIGER Drylac® **Military Blue** 75/40051 20±5°



TIGER Drylac® **Crème 761** 75/15003 42±7°



TIGER Drylac® **Champagne 770 Metallic** 75/15006



TIGER Drylac® **Highland 790 Metallic** 75/50004




TIGER Drylac® **Silver Grey** (RAL 7045) 75/70049 30±5°



TIGER Drylac® **Bianco 752** 75/10002 57±7°



TIGER Drylac® **Champagne 771 Metallic** 75/15005



TIGER Drylac® **Rosso 791 Metallic** 75/30001



TIGER Drylac® **Jet Black** (RAL 9005) 75/80020 30±5°



TIGER Drylac® **Crème 762 Metallic** 75/15001



TIGER Drylac® **Azzuro 780 Metallic** 75/40001



TIGER Drylac® **Rosso 792 Metallic** 75/30002

fluoropolymer



TIGER Drylac® **Grey Classic 721**
75/70003 57±7*



TIGER Drylac® **Argento 704 Metallic** 75/90003



TIGER Drylac® **Grey Classic 722 Metallic** 75/70001



TIGER Drylac® **Argento 701 Metallic** 75/90004



TIGER Drylac® **Argento 705 Metallic** 75/90002



TIGER Drylac® **Grey Classic 723**
75/70002 30±5*



TIGER Drylac® **Crème 760**
75/15002 30±5*



TIGER Drylac® **Mica 710 Metallic**
75/90006



TIGER Drylac® **Deore 731 Metallic**
75/90009



TIGER Drylac® **Argento 702 Metallic** 75/90012



TIGER Drylac® **Mica 711 Metallic**
75/90008



TIGER Drylac® **Carbon 741 Metallic**
75/80002



TIGER Drylac® **Argento 703 Metallic** 75/90013



TIGER Drylac® **Mica 712 Metallic**
75/90005



TIGER Drylac® **Carbon 742 Metallic**
75/80001

*Gloss level according to Gardner 60° ASTM D523.
Paper and ink limitations of color samples as well as influence from heat and light account for differences from actual powder coatings.

Note

A top-coat with a clear powder coating over an interior grade powder coating does not produce a weather resistant coating. In case a two-coat system consisting of an epoxy primer for corrosion protection and a Series 75 top coat is applied, UV transmission of the top coat has to be controlled by pigmentation and film thickness. TIGER Drylac® Series 75 is slightly incompatible with other powder coatings. It is therefore highly recommended to thoroughly clean the entire coating line prior to and after the powder application. The curing of TIGER Drylac® Series 75 will result in the emission of small doses of ϵ -caprolactam, which may cause minor smoke and odor. Provide sufficient ventilation and observe maximum allowable concentration guidelines.

Health & Safety Environment

For HSE relevant information please consult Material Safety Datasheet. Work place regulations are the responsibility of the applicator.

Performance Data on Aluminum

Checked under laboratory conditions on a yellow chromated aluminum test panel, which is 0.7 (mm) thick. Actual product performance may vary due to product specific properties such as gloss, color, effect and finish as well as application related and environmental influences.

Please note

Experience has shown that degradation similar to 10-year Florida exposure can be expected with 11,000 hours of accelerated weathering with UV-A lamps or 3,000 hours of UV-B lamps.

At this point we cannot claim full AAMA compliance, since some of the tests required – most notably Florida exposure – have extended duration. Performance can be reasonably anticipated based on accelerated weathering data with QUV-A and B tests, as well as references with related coating technologies using comparable polymer systems. It is well known that Fluoropolymers are offering superior performance, and all the coating systems that are available for compliance with AAMA 2605-05 are based on these materials.

Due to the chemical makeup of the coating, flexibility is decreased when compared to polyester-based products. Post-forming operations need to be verified beforehand for feasibility. Cracks in the coating can lead to corrosion.

Joint sealants and any other auxiliary products, such as glazing agents, gliding waxes, drilling and cutting lubricants, which come in contact with the coated surface, must be pH-neutral and free of substances which may damage the finish. Prior to coating a suitability test at the applicator is therefore highly recommended.

Test result	Test Method	TIGER Drylac® Series 75
Film Thickness (1-coat system)	ISO 2360	approx. 50-65 μm / approx. 2.0-2.5 mils*
Gloss – 60°	AAMA 2605-05 / Section 7.2	pass
Dry Adhesion	AAMA 2605-05 / Section 7.4.1.1	pass
Impact resistance 3 mm deformation	AAMA 2605-05 / Section 7.5	pass
Humidity Resistance 4,000 h	AAMA 2605-05 / Section 7.8.1	pass
Salt Spray Resistance 4,000 h	AAMA 2605-05 / Section 7.8.2	pass
QUV-B Resistance 3,000h	ASTM G-53	> 75 % gloss retention
QUV-A Resistance 11,000h	ASTM G-53	> 75 % gloss retention

* Above 2.5 mils the mechanical properties will degrade.

Florida Exposure 10 years – Florida Exposure 10 years based on fluoropolymer, which meets AAMA 2605-05		
Color retention	AAMA 2605-05 / Section 7.9.1.2	Less than 5 dE (Hunter)
Gloss retention	AAMA 2605-05 / Section 7.9.1.4	> 50%

Cleaning Recommendations

Please see information sheets (latest edition).

Chemical Resistance

Tested	According to AAMA	Test Duration	Results
Muriatic acid (10%)	AAMA 2605-05 / Section 7.7.1	15 min	no blistering or discoloration – pass
Mortar resistance	AAMA 2605-05 / Section 7.7.2	24 hrs	easy removal of mortar, no delamination, no discoloration – pass
Nitric Acid resistance (70%)	AAMA 2605-05 / Section 7.7.3	30 min	discoloration < 5dE – pass
Detergent resistance (3%)	AAMA 2605-05 / Section 7.7.4	72 hrs	no loss of adhesion, no blisters, no visual changes – pass
Window cleaner resistance	AAMA 2605-05 / Section 7.7.5	24 hrs	no blistering or change of appearance

EUROPE

AUSTRIA

TIGERWERK
Lack- u. Farbenfabrik GmbH & Co.KG.
Negrellistraße 36
A-4600 Wels
phone +43 / (0)7242 / 400-0
fax +43 / (0)7242 / 650 08
office@tiger-coatings.com
www.tiger-coatings.com

BELGIUM

Mr. Eric Kun
Hendrik Van Veldekestraat 35
B-3680 Maaseik
phone +32 / (0)497 / 41 57 97
fax +32 / (0)89 / 56 78 58
office.be@tiger-coatings.com

C&E Warehousing

Lieverbroek 1019
B-3640 Kinrooi
phone +32 / (0)497 / 92 25 70
fax +32 / (0)89 / 56 78 58

BOSNIA & HERZEGOVINA

Klio d.o.o.
Majevickih brigada BB
BIH-75300 Lukavac
phone +387 / 35 / 555 392
fax +387 / 35 / 553 256
office.bih@klio.hr

Klio 1
Zaima Topčića br. 9
BIH-71210 Ilidža, Sarajevo
phone +387 / 35 / 626 621

CROATIA

Klio d.o.o.
Varaždinska cesta 34
10360 Zagreb Sesvete
phone +385 / (0)1 / 200 90 41
fax +385 / (0)1 / 200 90 43
klio@klio.hr

CZECH REPUBLIC

TIGERLAK, s.r.o.
Kaštanová 34 a
CZ-620 00 Brno
phone +420 / 5 / 45 42 91 10
fax +420 / 5 / 45 22 92 09
office.cz@tiger-coatings.com

DENMARK

Ms. Brigitte Pudor Gullev
Avntofvej 34, Søgaard
DK-6200 Aabenraa
phone +45 / 73 62 13 23
mobil +45 / 21 20 45 20
fax +45 / 73 62 13 24
office.dk@tiger-coatings.com

FRANCE

TIGER S.A.R.L.
Avenue de Lossburg,
Zone Industrielle Sud
F-69480 Anse
phone +33 / (0)474 / 67 13 70
fax +33 / (0)474 / 67 10 42
office.fr@tiger-coatings.com

GERMANY

KLOZ Kunststofftechnik GmbH
Daimlerstraße 16
D-70736 Fellbach-Deffingen
phone +49 / (0)711 / 95 19 80 32
fax +49 / (0)711 / 518 07 50
info@kloz-kunststofftechnik.de

KLOZ Wickede
Gerkenstraße 4
D-58739 Wickede-Ruhr
phone +49 / (0)2377 / 36 25
fax +49 / (0)2377 / 26 22

Dr. Herrmann GmbH
Grüne Straße 17
D-01067 Dresden
phone +49 / (0)351 / 496 11 03
fax +49 / (0)351 / 496 11 47
herrmann.gmbh.dresden@t-online.de

Jochen Hänel
Handelsvertretung Industrielle
Sandstraße 1
D-65239 Hochheim a. M.-Süd
phone +49 / (0)6146 / 83 58 81
fax +49 / (0)6146 / 83 58 84
jhaenel@gmx.de

Boris Herrmann Handelsvertretung
Kopernikusstraße 35
D-44309 Dortmund
phone +49 / (0)231 / 25 70 12
fax +49 / (0)231 / 25 70 15
b.herrmann@tiger-coatings.com

Thomas Leitzke Handelsvertretung
Obereyler Straße 68a
D-47647 Kerken
phone +49 / (0)2833 / 57 39 32
fax +49 / (0)2833 / 57 39 33
t.leitzke@tiger-coatings.com

GREAT BRITAIN

TIGER COATINGS UK LTD
21, Pettyfields Close, Knowle
Solihull, West Midlands, B93 9EG
Phone/Fax +44 / (0) 1564 778 866
office.gb@tiger-coatings.com

HUNGARY

TIGERLAK Kft.
Gyömri út 85-91
H-1183 Budapest
phone +36 / (0)61293 / 90 20
fax +36 / (0)61297 / 45 49
office.hu@tiger-coatings.com

ITALY

TIGER Drylac Italia s.r.l.
Viale Papa Giovanni XXIII, 64
I-24121 Bergamo
phone +39 / 035 / 417 39 67
fax +39 / 035 / 22 37 11
office.it@tiger-coatings.com

LITHUANIA, LATVIA

UAB „LAKMALIT“
Kestučio g. 87
LT-3000 Kaunas
phone +370 / 7 / 32 37 41, 32 34 95
fax +370 / 7 / 32 40 87
kaunas@lakmalit.lt

THE NETHERLANDS

Mr. Ben de Jong
Grote Belt 288
NL-2133 GJ Hoofddorp
phone +31 / (0)6 / 419 956 80
fax +31 / (0)23 / 565 58 72
office.nl@tiger-coatings.com

POLAND

Tensor Consulting
Sepia 22
PL-04512 Warszawa
phone +48 / (0)22 / 815 42 79
fax +48 / (0)22 / 815 42 79
ajelonek@tensor.com.pl

ROMANIA

ASKO Group srl.
Str. Filateliei nr. 1/2
R-1900 Timisoara
phone +40 / (0)256 / 20 64 03
fax +40 / (0)256 / 20 64 03
askogroup@mail.dnttm.ro

RUSSIA

ODO Tecnocolor-M
Otkrytoe shosse 48a
107370 Moscow, Russia
phone +007 / 095 / 966 75 08
fax +007 / 095 / 963 47 45
sales@tecnocolor.ru

SERBIA & MONTENEGRO

Klio NS d.o.o.
Pere Popadića 5/2
SCG-21000 Novi Sad
phone/fax +381 / 21 / 478 01 08
office@klio.co.yu

SLOVAKIA

TIGERLAK Slovakia spol.s r.o.
Bratislavská 79
SK-902 01 Pezinok
phone +421 / (0)33 / 640 00 71
fax +421 / (0)33 / 640 00 72
office.sk@tiger-coatings.com

SLOVENIA

T-Lotus d.o.o.
Stari trg 3 / 2
SLO-9240 Ljutomer
phone +386 / (0)2 / 583 18 79
fax +386 / (0)2 / 583 18 80
kontakt@t-lotus.si

UKRAINE

Interfarb - Ukraina
Akademika Sacharova 42, Office N°230
UA-79012 Lvov
phone +380 / 322 / 40 23 11
fax +380 / 322 / 40 23 80
ifu@lviv.farlep.net

THE AMERICAS

ARGENTINA

Glass + Partner S.A.
Tamborini 3231 / 33
AR-1429 Buenos Aires
phone +54 / 114 / 541 70 58
fax +54 / 114 / 541 70 58
glasspartner@arnet.com.ar

BRAZIL

TIGER Drylac do Brasil Ltda.
Av. 14 de Dezembro, 3020
13206-105 Jundiaí-SP
phone +55 / 11 / 45 26 00 42
fax +55 / 11 / 45 87 55 43
office.br@tiger-coatings.com

CANADA

ONTARIO: TIGER Drylac Canada Inc.
110 Southgate Drive
Guelph, Ontario, N1G 4P5
phone +1 / 519 / 766 47 81
fax +1 / 519 / 766 47 87
info@tigerdrylaccanada.com

QUEBEC: TIGER Drylac Canada Inc.
7370 Henri Bourassa Blvd. E.
Anjou, Quebec H1E 1P2
phone +1 / 514 / 351 53 31
fax +1 / 514 / 351 40 15
tigerqc@microtec.net

CALGARY: TIGER Drylac Canada Inc.
4752 14th Street Northeast
Calgary, Alberta Canada T2E 6L7
phone +1 / 403 / 398 97 23
fax +1 / 403 / 398 97 25
info@tigerdrylaccanada.com

VANCOUVER: TIGER Drylac Canada Inc.
680 Derwent Way
Delta, BC V3M 5P8
phone +1 / 604 / 540 97 26
fax +1 / 604 / 540 97 25
vancouver@tigerdrylaccanada.com

CHILE

TIGER Drylac de Chile Ltda.
Los Prunos 1615
San Ramon, Santiago de Chile
phone +56 / 2 / 511 56 59
fax +56 / 2 / 511 56 59
office.cl@tiger-coatings.com

MEXICO

TIGER Drylac MEXICO S.A. DE C.V.
Purepechas 28-D
Col. Santa Cruz Acatlan,
Naucalpan
Edo. de Mexico C.P. 53150
phone +52 / 555 / 363 12 14
fax +52 / 555 / 363 17 39
mexico@tigerdrylac.com

U.S.A.

TIGER Drylac U.S.A., Inc. (HQ' s)
1261 East Belmont St.
Ontario, CA 91761
phone +1 / 909 / 930 91 00
fax +1 / 909 / 930 91 11
customerservicewest@tigerdrylac.com

TIGER Drylac U.S.A., Inc.
18808 142nd Ave. NE., # 2 B
Woodinville, WA 98072
phone +1 / 425 / 481 31 60
fax +1 / 425 / 481 11 36
customerservicenw@tigerdrylac.com

TIGER Drylac U.S.A., Inc.
3855 Swenson Ave.
St. Charles, IL 60174
phone +1 / 630 / 513 99 99
fax +1 / 630 / 513 99 98
customerservicemw@tigerdrylac.com

TIGER Drylac U.S.A., Inc.
1100 Commons Blvd.
Reading, PA 19605
phone +1 / 610 / 926 81 48
fax +1 / 610 / 926 81 49
customerserviceeast@tigerdrylac.com

TIGER Drylac U.S.A., Inc.
3400 Town Point Drive NW, Ste. 140
Kennesaw, GA 30144
phone +1 / 770 / 218 24 90
fax +1 / 770 / 218 24 95
customerserviceeast@tigerdrylac.com

TIGER Drylac U.S.A., Inc.
339 Exchange Drive
Arlington TX 76011
phone +1 / 817 / 277 79 95
fax +1 / 817 / 277 19 31
customerservicesouth@tigerdrylac.com

ASIA

CHINA

TIGER Drylac (Taicang) Co. Ltd.
68 Chaoyang Road
Taicang, Jiangsu 215400
P.R. China
phone +86 / (0)512 / 53 56 06 19
fax +86 / (0)512 / 53 95 50 95
office.cn@tiger-coatings.com

HONG KONG

TIGER Coatings Hong Kong Limited
Room 703 Kowloon Building
555 Nathan Road, Kowloon, Hong Kong
phone +852 / 27 81 55 82
fax +852 / 27 82 58 86
office.hk@tiger-coatings.com

INDIA

National Corporation
No. 121, 5th Cross,
Kalasipalayam New Extension
Bangalore-560 002, India
phone +91 / (0)80 / 222 265 54
fax +91 / (0)80 / 222 148 00
rsachdev@vsnl.com

JAPAN

TIGER Drylac JAPAN K.K.
170-5, Oshima, Sagamihara
Kanagawa, 229-1135, Japan
phone +81 / (0)42 / 760 60 56
fax +81 / (0)42 / 760 60 57
office.jp@tiger-coatings.com

MALAYSIA

TIGER Drylac MALAYSIA Sdn. Bhd.
Level 26, Menara IMC
No. 8 Jalan Sultan Ismail
50250, Kuala Lumpur
phone +60 / (0)3 / 20 39 43 15
fax +60 / (0)3 / 20 31 83 59
office.my@tiger-coatings.com

SINGAPORE

TIGER Drylac SINGAPORE Pte. Ltd.
No. 3 Jalan Lengkok Sembawang,
SINGAPORE 759196
phone +65 / 67 59 94 33
fax +65 / 67 59 94 36
office.sg@tiger-coatings.com

TAIWAN

Vigorport Int. Co., Ltd.
No. 398 Ta-Tun 6th Street, Taichung,
Taiwan
phone +886 / (0)4 / 23 82 21 23
fax +886 / (0)4 / 23 82 21 11
office.tw@tiger-coatings.com

THAILAND

Grand Siam Commercial Co., Ltd.
999/81 Prachauthit Road
Huay-Kwang, Bangkok 10320
phone +66 / 2 / 691 62 74
fax +66 / 2 / 691 22 25
apichart@samart.co.th

VIETNAM

TIGER Drylac Vietnam Co., Ltd.
Road No. 2, Dong An Industrial Park
Thuan An District, Binh Duong Province,
phone +84 / 650 / 758 370
fax +84 / 650 / 758 371
office.vn@tiger-coatings.com



Member of the
Powder Coating Institute